

VISIBILITY | TORQUEABILITY | TRACKABILITY

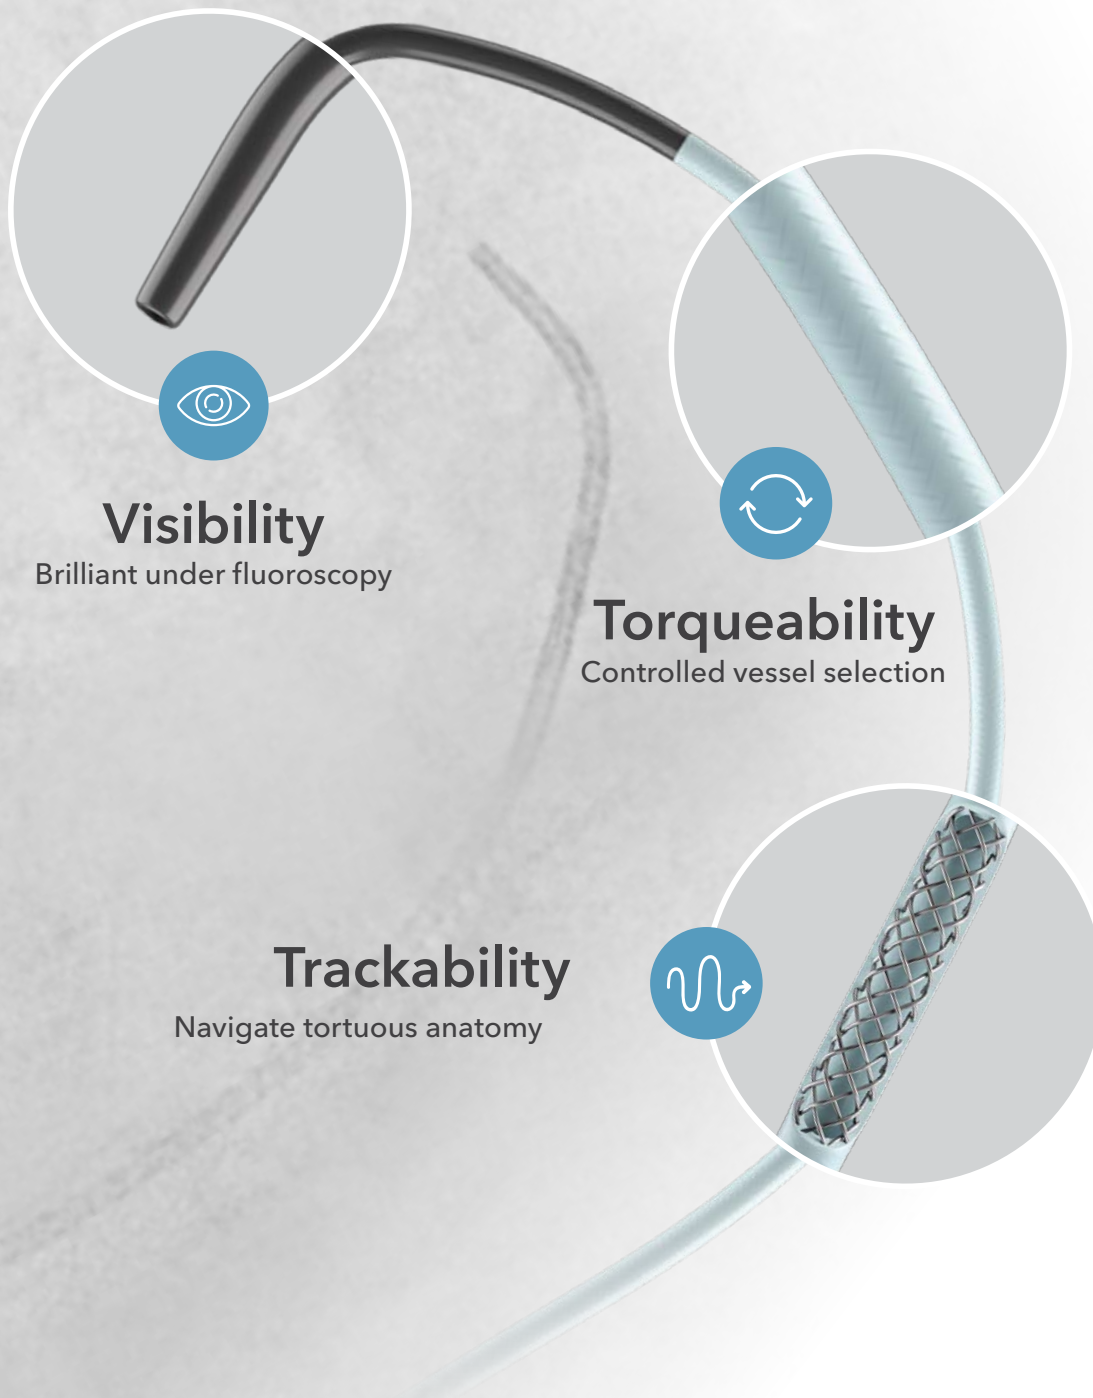
Control you can feel. Navigation you can trust.



MORE THAN
40
TIP CURVES

Beacon[®] Tip
ANGIOGRAPHIC CATHETER





Visibility

Brilliant under fluoroscopy

Torqueability

Controlled vessel selection

Trackability

Navigate tortuous anatomy

Visibility

Radiopaque tip technology for visibility during catheter manipulation

Torqueability

Nearly 1:1 torque response to easily select the desired vessel

Trackability

Nylon construction with stainless steel braiding through the shaft to successfully navigate through tortuous anatomy

Designed to protect

Catheters are packaged in foil to protect the integrity of the catheter material.

- Testing shows that these catheters are less susceptible to tip separation compared to competitors^{1,2}
- Foil packaging significantly reduces the risk of environmental factors, including light, humidity, and VHP.^{1,2}



Two-year shelf life

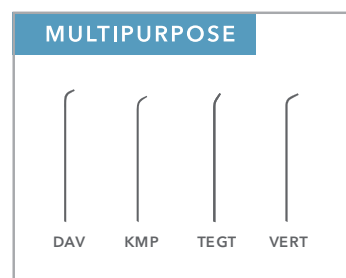
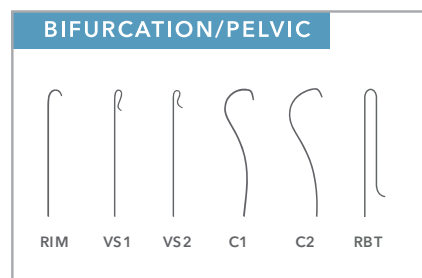
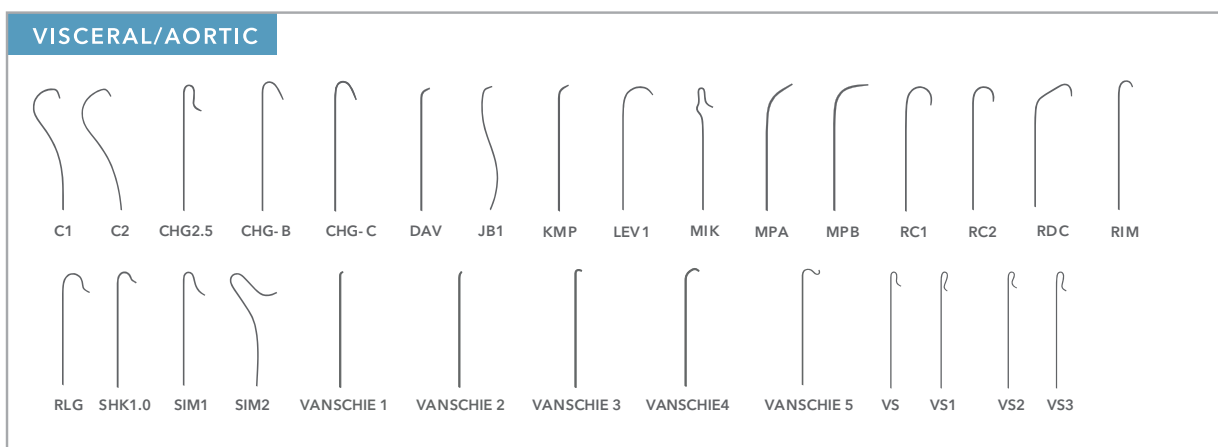
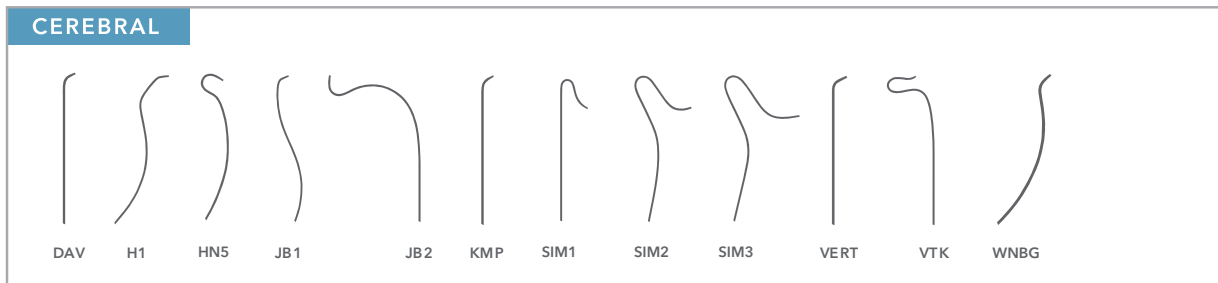


Protection against light & humidity damage



Fr	Catheter Length cm	Flow Rate mL/sec	kg/cm ²	psi	
		MAXIMUM FLOW RATE	MAXIMUM RECOMMENDED PRESSURE		
5.0	40	13	82	1200	
5.0	65	11	82	1200	
5.0	80	9	82	1200	
5.0	100	9	82	1200	
5.0	125	7	82	1200	

Common Catheter Curves



Vessel (average diameter)

CEREBRAL

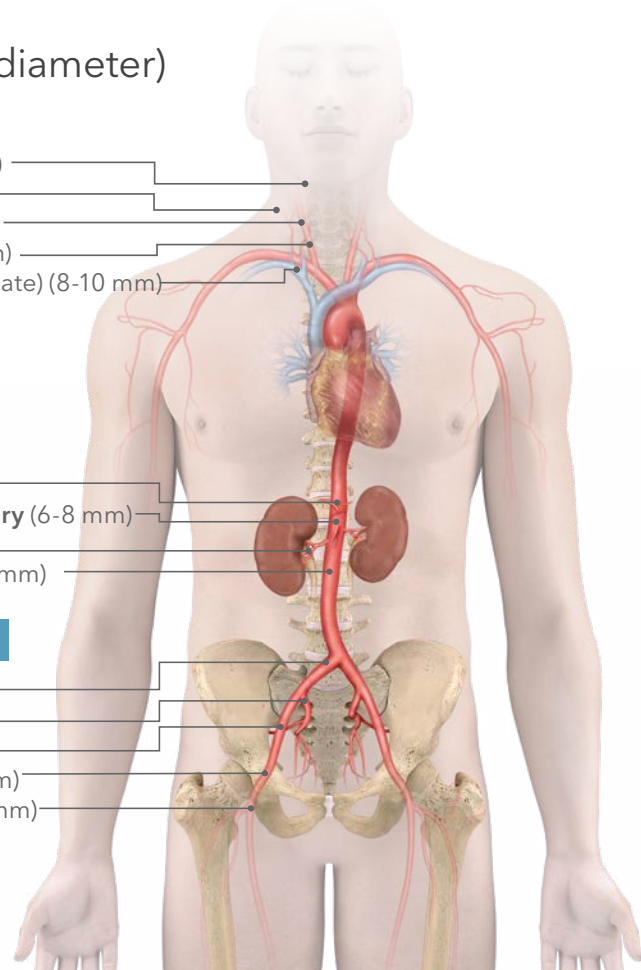
- External carotid (5-6 mm)
- Vertebral (3-5 mm)
- Internal carotid (5-6 mm)
- Common carotid (5-8 mm)
- Brachiocephalic (innominate) (8-10 mm)

VISCERAL/AORTIC

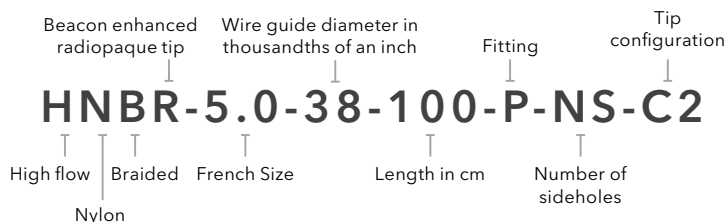
- Celiac trunk (5-7 mm)
- Superior Mesenteric Artery (6-8 mm)
- Renal (5-7 mm)
- Descending aorta (16-18 mm)

BIFURCATION/PELVIC

- Common iliac (7-10 mm)
- Internal iliac (5-6 mm)
- External iliac (6-8 mm)
- Common femoral (6-8 mm)
- Superficial femoral (4-6 mm)















ORDERING RPN KEY





















Order Number	Reference Part Number (RPN)	Fr	Accepts Wire Guide Diameter inch	Length cm	Tip Configuration	
G08441	HNBR5.0-35-65-P-NS-C1	5.0	0.035	65	C1	
G08446	HNBR5.0-38-65-P-NS-C1	5.0	0.038	65		
G11203	HNBR5.0-38-80-P-NS-C1	5.0	0.038	80		
G08623	HNBR5.0-35-100-P-NS-C1	5.0	0.035	100		
G08442	HNBR5.0-35-65-P-NS-C2	5.0	0.035	65	C2	
G08447	HNBR5.0-38-65-P-NS-C2	5.0	0.038	65		
G11202	HNBR5.0-35-80-P-NS-C2	5.0	0.035	80		
G08586	HNBR5.0-38-80-P-NS-C2	5.0	0.038	80		
G08796	HNBR5.0-35-100-P-NS-C2	5.0	0.035	100		
G11430	HNBR5.0-38-80-P-NS-CHG2.5	5.0	0.038	80	CHG2.5	
G13560	HNBR5.0-38-80-P-NS-CHG-B	5.0	0.038	80	CHG-B	
G13561	HNBR5.0-38-80-P-NS-CHG-C	5.0	0.038	80	CHG-C	
G31970	HNBR5.0-35-125-P-NS-C-PS	5.0	0.035	125	C-PS	
G11414	HNBR5.0-35-65-P-NS-DAV	5.0	0.035	65	DAV	
G11435	HNBR5.0-38-65-P-NS-DAV	5.0	0.038	65		
G08699	HNBR5.0-35-100-P-NS-DAV	5.0	0.035	100		
G08581	HNBR5.0-38-100-P-NS-DAV	5.0	0.038	100		
G11375	HNBR5.0-35-125-P-NS-DAV	5.0	0.035	125		
G11204	HNBR5.0-35-100-P-NS-FC3	5.0	0.035	100	FC3	
G08421	HNBR5.0-35-100-P-NS-H1	5.0	0.035	100	H1	
G08419	HNBR5.0-38-100-P-NS-H1	5.0	0.038	100		
G09899	HNBR5.0-38-100-P-NS-HN5	5.0	0.038	100	HN5	

ORDERING INFORMATION

Order Number	Reference Part Number (RPN)	Fr	Accepts Wire Guide Diameter inch	Length cm	Tip Configuration	
G11208	HNBR5.0-38-65-P-NS-JB1	5.0	0.038	65	JB1	
G08472	HNBR5.0-35-100-P-NS-JB1	5.0	0.035	100		
G08583	HNBR5.0-38-100-P-NS-JB1	5.0	0.038	100		
G11726	HNBR5.0-38-125-P-NS-JB1	5.0	0.038	125		
G08809	HNBR5.0-35-100-P-NS-JB2	5.0	0.035	100	JB2	
G09654	HNBR5.0-38-100-P-NS-JB2	5.0	0.038	100		
G09751	HNBR5.0-35-40-P-NS-KMP	5.0	0.035	40	KMP	
G09548	HNBR5.0-38-40-P-NS-KMP	5.0	0.038	40		
G11458	HNBR5.0-35-65-P-NS-KMP	5.0	0.035	65		
G09469	HNBR5.0-38-65-P-NS-KMP	5.0	0.038	65		
G11457	HNBR5.0-38-100-P-NS-KMP	5.0	0.038	100		
G11194	HNBR5.0-38-65-P-NS-LEV1	5.0	0.038	65	LEV1	
G09312	HNBR5.0-38-80-P-NS-MIK	5.0	0.038	80	MIK	
G11195	HNBR5.0-38-65-P-NS-MPA	5.0	0.038	65	MPA	
G11467	HNBR5.0-38-80-P-NS-MPA	5.0	0.038	80		
G11205	HNBR5.0-38-100-P-NS-MPA	5.0	0.038	100		
G12154	HNBR5.0-38-125-P-NS-MPA	5.0	0.038	125		
G11469	HNBR5.0-38-80-P-NS-MPB	5.0	0.038	80	MPB	
G57015	HNBR5.0-35-65-P-NS-RBT	5.0	0.035	65	RBT	
G57017	HNBR5.0-35-90-P-NS-RBT	5.0	0.035	90		
G08469	HNBR5.0-35-65-P-NS-RC1	5.0	0.035	65	RC1	
G08641	HNBR5.0-38-65-P-NS-RC1	5.0	0.038	65		
G08470	HNBR5.0-35-65-P-NS-RC2	5.0	0.035	65	RC2	
G08642	HNBR5.0-38-65-P-NS-RC2	5.0	0.038	65		
G08578	HNBR5.0-38-65-P-NS-RDC	5.0	0.038	65	RDC	
G08444	HNBR5.0-35-65-P-NS-RIM	5.0	0.035	65	RIM	
G10082	HNBR5.0-38-65-P-NS-RIM	5.0	0.038	65		
G12870	HNBR5.0-38-100-P-NS-RIM	5.0	0.038	100		

ORDERING INFORMATION

Order Number	Reference Part Number (RPN)	Fr	Accepts Wire Guide Diameter inch	Length cm	Tip Configuration	
G09371	HNBR5.0-38-65-P-NS-RLG	5.0	0.038	65	RLG	
G27853	HNBR5.0-38-80-P-NS-RLG	5.0	0.038	80		
G11476	HNBR5.0-38-65-P-NS-SHK1.0	5.0	0.038	65	SHK1.0	
G08677	HNBR5.0-38-65-P-NS-SIM1	5.0	0.038	65	SIM1	
G08471	HNBR5.0-35-100-P-NS-SIM1	5.0	0.035	100		
G08584	HNBR5.0-38-100-P-NS-SIM1	5.0	0.038	100		
G08625	HNBR5.0-38-65-P-NS-SIM2	5.0	0.038	65	SIM2	
G08422	HNBR5.0-35-100-P-NS-SIM2	5.0	0.035	100		
G08420	HNBR5.0-38-100-P-NS-SIM2	5.0	0.038	100		
G11517	HNBR5.0-38-125-P-NS-SIM2	5.0	0.038	125		
G08597	HNBR5.0-35-100-P-NS-SIM3	5.0	0.035	100	SIM3	
G08585	HNBR5.0-38-100-P-NS-SIM3	5.0	0.038	100		
G11377	HNBR5.0-38-65-P-NS-TEGT	5.0	0.038	65	TEGT	
G11193	HNBR5.0-38-100-P-NS-TEGT	5.0	0.038	100		
G31410	HNBR5.0-35-40-P-NS-VANSCHIE1	5.0	0.035	40	VANSCHIE1	
G13795	HNBR5.0-35-65-P-NS-VANSCHIE1	5.0	0.035	65		
G35733	HNBR5.0-35-125-P-NS-VANSCHIE1	5.0	0.035	125		
G31409	HNBR5.0-35-40-P-NS-VANSCHIE2	5.0	0.035	40	VANSCHIE2	
G13794	HNBR5.0-35-65-P-NS-VANSCHIE2	5.0	0.035	65		
G35734	HNBR5.0-35-125-P-NS-VANSCHIE2	5.0	0.035	125		
G31408	HNBR5.0-35-40-P-NS-VANSCHIE3	5.0	0.035	40	VANSCHIE3	
G13792	HNBR5.0-35-65-P-NS-VANSCHIE3	5.0	0.035	65		
G35735	HNBR5.0-35-125-P-NS-VANSCHIE3	5.0	0.035	125		
G13783	HNBR5.0-35-65-P-NS-VANSCHIE4	5.0	0.035	65	VANSCHIE4	
G35736	HNBR5.0-35-125-P-NS-VANSCHIE4	5.0	0.035	125		
G13793	HNBR5.0-35-65-P-NS-VANSCHIE5	5.0	0.035	65	VANSCHIE5	
G35737	HNBR5.0-35-125-P-NS-VANSCHIE5	5.0	0.035	125		
G11484	HNBR5.0-38-100-P-NS-VERT	5.0	0.038	100	VERT	
G12170	HNBR5.0-38-125-P-NS-VERT	5.0	0.038	125		

Order Number	Reference Part Number (RPN)	Fr	Accepts Wire Guide Diameter inch	Length cm	Tip Configuration	
G11209	HNBR5.0-38-80-P-NS-VS	5.0	0.038	80	VS	
G11189	HNBR5.0-38-80-P-NS-VS1	5.0	0.038	80	VS1	
G35974	HNBR5.0-35-125-P-NS-VS1	5.0	0.035	125		
G11190	HNBR5.0-38-80-P-NS-VS2	5.0	0.038	80	VS2	
G11191	HNBR5.0-38-80-P-NS-VS3	5.0	0.038	80	VS3	
G27829	HNBR5.0-38-100-P-NS-VTK	5.0	0.038	100	VTK	
G11642	HNBR5.0-38-125-P-NS-VTK	5.0	0.038	125		
G08805	HNBR5.0-35-100-P-NS-WNBG	5.0	0.035	100	WNBG	
G08582	HNBR5.0-38-100-P-NS-WNBG	5.0	0.038	100		

Some products or part numbers may not be available in all markets. Contact your local Cook representative or Customer Support & Distribution for details.

Scan here to find out more about Beacon Tip catheters



Customer Service

EU Website: cookmedical.eu
 EDI: cookmedical.eu/edi
 Distributors: +353 61239240, ssc.distributors@cookmedical.com
 Austria: +43 179567121, oe.orders@cookmedical.com
 Belgium: +32 27001702, be.orders@cookmedical.com
 Denmark: +45 38487607, da.orders@cookmedical.com
 Finland: +358 972519996, fi.orders@cookmedical.com
 France: +33 171230269, fr.orders@cookmedical.com
 Germany: +49 6950072804, de.orders@cookmedical.com
 Hungary: +36 17779199, hu.orders@cookmedical.com
 Iceland: +354 8007615, IS.orders@cookmedical.com
 Ireland: +353 61239252, ie.orders@cookmedical.com
 Italy: +39 0269682853, it.orders@cookmedical.com
 Netherlands: +31 202013367, nl.orders@cookmedical.com
 Norway: +47 23162968, no.orders@cookmedical.com
 Spain: +34 912702691, es.orders@cookmedical.com
 Sweden: +46 858769468, se.orders@cookmedical.com
 Switzerland - French: +41 448009609, fr.orders@cookmedical.com
 Switzerland - Italian: +41 448009609, it.orders@cookmedical.com
 Switzerland - German: +41 448009609, de.orders@cookmedical.com
 United Kingdom: +44 2073654183, uk.orders@cookmedical.com

USA Website: cookmedical.com
 EDI: cookmedical.com/edi.do
Americas:
 Phone: +1 812.339.2235, 800.457.4500, Fax: 800.554.8335
 E-mail: customersupport@cookmedical.com
Australia:
 Phone: +61 734346000, 1800777222, Fax: +61 734346001, 1800077283
 E-mail: cau.custserv@cookmedical.com



AI, ESC, IR, OHNS, PI, RH, SUR-8.5X11